


Round Tilt 120 Dark

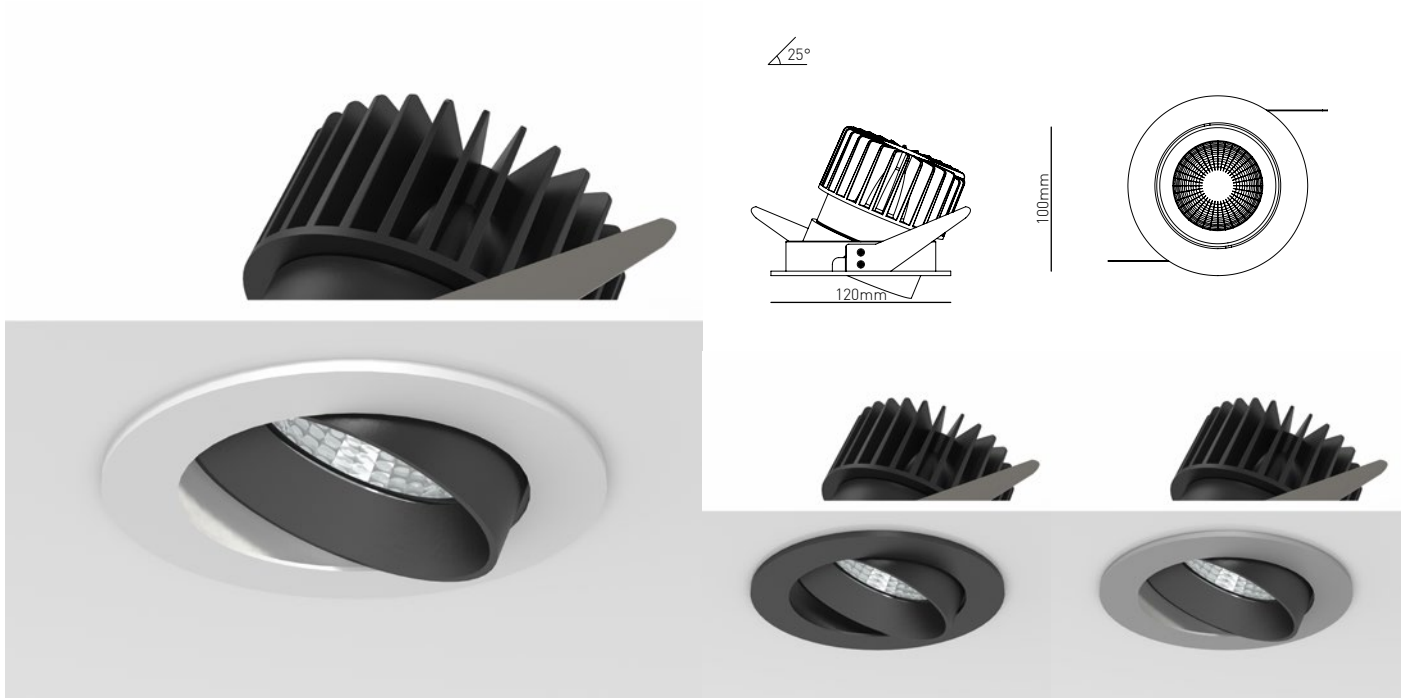

Features

- Energy saving
- Full intensity from switch on
- Interchangeable LED engine
- Wide range of LED CCTs and reflectors
- Warm Dim 3000°K-2000°K option
- CREE 2 step McAdam LEDs
- CRI >95 available on request
- Long life L70 50,000 hrs based on LM-80 & TM-21 applicable test data
- Remote constant current driver with S.E.L.V. output
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

Accessories

Accessories

- 2406.2073 Honeycomb louvre
- 2408.73 Spread lens

Luminaire Specification

Height	100mm
Bezel	Ø120mm
Hole cut-out	Ø108mm
Adjustability	35° Tilt
Luminaire material	Die cast Aluminium with textured powder coat.
IP Rating	IP20

LED Specification

LED	DXX : CREE CXB	
Output	D35 (12W) : 1570lm (130lm/W) D55 (19W) : 2292lm (120lm/W) D70 (25W) : 2777lm (111lm/W) DW (30W) : 2500lm (83lm/W)	
CRI/CCT	2700°K, 3000°K, 4000°K, 5000°K >80Ra as standard >90Ra option 90Ra : Warm Dim (DW) 3000°K-2000°K	
Optics	Narrow 20°, medium 30°, wide 40°, wide 50°, flood 60°	
Drive current	D35 : 350mA D70 : 700mA	D55 : 550mA DW : 850mA

Ordering Information example 21652.233D55

Model	Finish	LED CCT	Driver	Version	CRI
21652. Narrow 20°	1 White	2 2700°K	2 Phase dimming	D35 12W / 350mA	CRI (std)
21653. Medium 30°	2 Black	3 3000°K	3 0-10V Dimming	D55 19W / 550mA	9 CRI >90
21654. Wide 40°	7 Silver	4 4000°K	4 DALI Dimming	D70 25W / 700mA	
21655. Wide 50°		5 5000°K		DW 30W / 850mA ⁽ⁱ⁾	
21656. Flood 60°					

(i) Typical lumen output subject to selected CCT & optic combinations. (ii) Warm dimming option available in 3000°K-2000°K only, example part code 21652.132DW