


Cone 80

3 Chip XP-G3

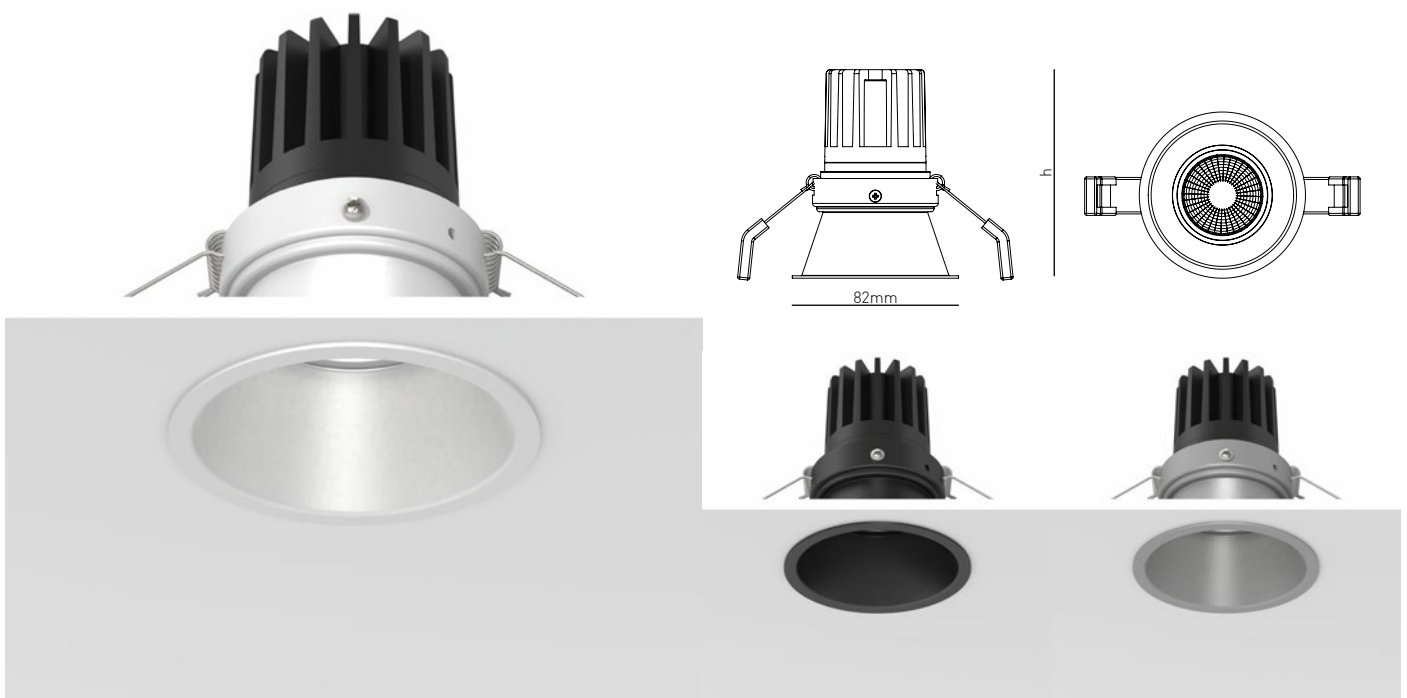

Features

- Energy saving
- Full intensity from switch on
- Interchangeable LED engine
- Wide range of LED CCTs and optics
- CREE 2 step McAdam LEDs
- Long life L70 50,000 hrs based on LM-80 & TM-21 applicable test data
- Remote constant current driver with S.E.L.V. output
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

Luminaire Specification

Height	110mm
Bezel	Ø82mm
Hole cut-out	Ø73mm
Luminaire material	Aluminium with textured powder coat finish.
IP Rating	IP20 IP44/IP65 option

LED Specification

LED	CREE XP-G3
Output (per head)	6W (3 Chip) : 644lm (107lm/W)
CRI/CCT	90Ra : 2700°K, 3000°K 90Ra : 4000°K, 6000°K
Optics	Spot 10°, narrow 20°, medium 35°, wide 50°
Drive current	700mA

Ordering Information example 2244.2332

Model	Finish	LED CCT	Driver	Version	IP Rating
2241. Spot 10°	1 White	2 2700°K	1 Non-dimming	2 6W (3 Chip)	IP20
2242. Narrow 20°	2 Black	3 3000°K	2 Phase dimming		4 IP44
2243. Medium 35°	7 Silver	4 4000°K	3 0-10V Dimming		6 IP65
2245. Wide 50°		6 6000°K	4 DALI Dimming		

(i) Typical lumen output subject to selected CCT & optic combinations.