


Can 100

Array CXB

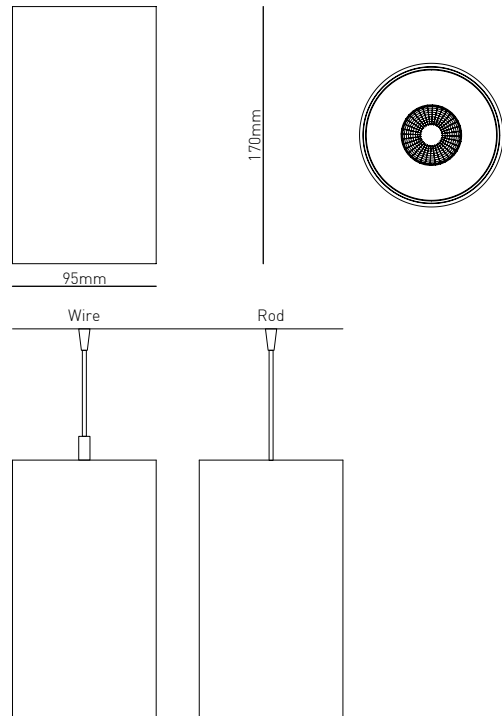

Features

- Energy saving
- Surface mount with pendant rod and wire options
- Full intensity from switch on
- Interchangeable LED engine
- Wide range of LED CCTs and reflectors
- Warm Dim 3000°K-2000°K option
- CREE 2 step McAdam LEDs
- CRI >95 available on request
- Long life L70 50,000 hrs based on LM-80 & TM-21 applicable test data
- Integral constant current driver with S.E.L.V. output
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

Luminaire Specification

Height	170mm
Bezel	Ø95mm
Luminaire material	Aluminium with textured powder coat finish.
IP Rating	IP20 IP65 option

LED Specification

LED	B / C : CREE CXB
Output	B / 8.6W : 1038lm (120lm/W) C / 12W : 1600lm (134lm/W) CW / 13W : 935lm (71lm/W)
CRI/CCT	2700°K, 3000°K, 4000°K, 5000°K >80Ra as standard >90Ra option 90Ra : Warm Dim
Optics	Narrow 20°, medium 30°, wide 40°, flood 60°
Drive current	B : 250mA C / CW : 350mA

Ordering Information example 2454.233C-W10

Model	Finish	LED CCT	Driver	Version	CRI	IP Rating	Mounting	Length	
2452.	Narrow 20°	1 White	2 2700°K	2 Phase dimming	B 8.6W	CRI (std)	IP20	Surface	N/A
2453.	Medium 30°	2 Black	3 3000°K	3 0-10V Dimming	C 12W	9 CRI >90	6 IP65	-R Pendant rod	10 100cm
2454.	Wide 40°	7 Silver	4 4000°K	4 DALI Dimming	CW 13W ⁽ⁱ⁾			-W Pendant wire	20 200cm
2456.	Flood 60°		5 5000°K						30 300cm

(i) Typical lumen output subject to selected CCT & optic combinations. (ii) Warm dimming option available in 3000°K-2000°K only, example part code 2454.233CW