


# Wall Recessed Round Wide

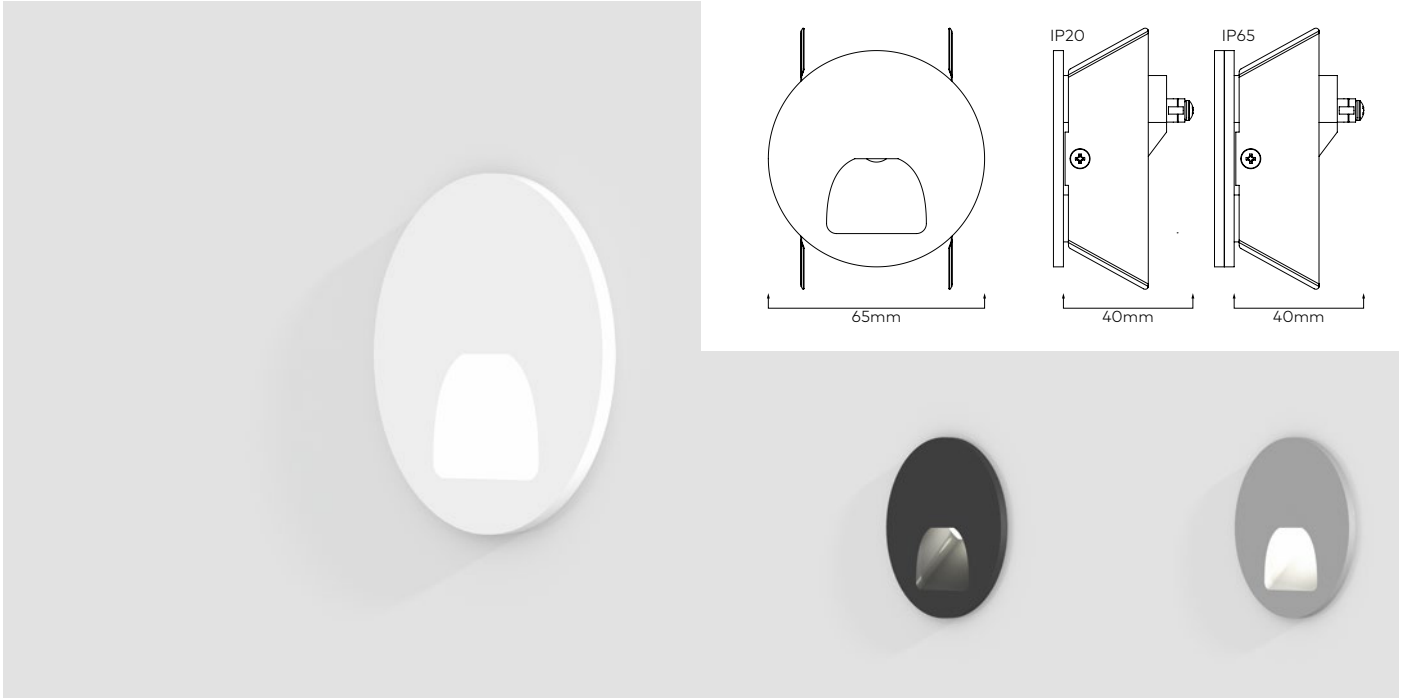

## Features

- Energy saving
- Full intensity from switch on
- Wide range of LED CCTs
- Low operating temperature
- Mains AC input

## Luminaire Specification

<b>Depth</b>	40mm
<b>Bezel</b>	Ø65mm
<b>Hole cut-out</b>	Ø56 Ø63 when using supplied fixing tube in solid walls
<b>Input supply</b>	220-240VAC
<b>Luminaire material</b>	Aluminium with textured powder coat finish.
<b>IP Rating</b>	IP20 & IP65 options

## LED Specification

<b>LED</b>	4W Mains - Traic dimmable
<b>CCT</b>	2700°K, 3000°K, 4000°K

## Ordering Information example 2548.23M40

Model	Finish	LED CCT	Version	IP Rating
2548. Round wide	1 White	2 2700°K	M4 Mains	0 IP20
	2 Black	3 3000°K		6 IP65
	5 Aluminium	4 4000°K		