


White Line 14x14mm

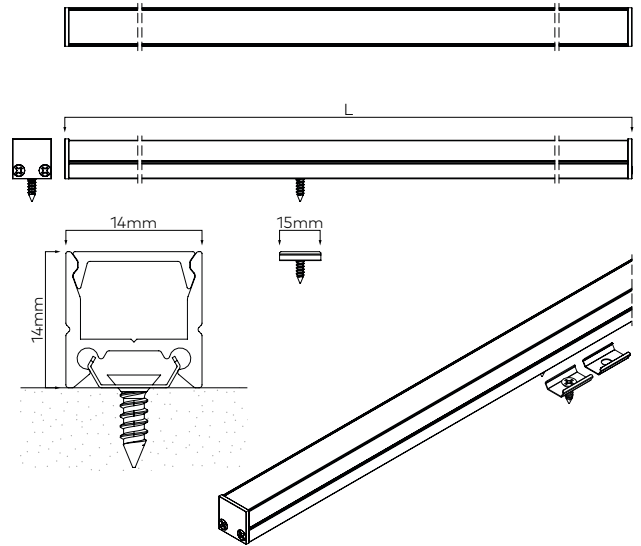

Features

- Energy saving
- Full intensity from switch on
- Wide range of LED CCTs and LED types
- Warm Dim option
- Easy connection with standard wire tails or plug and socket
- Each length supplied with end caps and fixings
- Long life L70 50,000 hrs based on LM-80 & TM-21 applicable test data
- 5 Year warranty

Specification

| | |
|---------------------------|---|
| Dimensions | 14x14mm |
| Length | 100cm & 200cm (custom lengths to order max. 2.5m) |
| Luminaire material | Aluminium |
| Diffuser | Frosted |
| IP Rating | IP20 |
| Driver | Remote 24V constant voltage |
| CCT | 2400°K, 2700°K, 3000°K, 4000°K, 6000°K |
| CRI | >90Ra |
| Binning | 3 Step MacAdam ellipse |

Ordering Information example 6914146.1C27692.2500

| Model | Finish | LED CCT | LED Type | Length |
|--|-------------|------------|-------------------------------|---------------------------|
| 6914146. 14x14mm with frosted diffuser | 1 White | C24 2400°K | 692 4.8W HD - 300/m - 420lm | .1000 1000mm |
| | 2 Black | C27 2700°K | 695 7.68W HD - 300/m - 670lm | .2000 2000mm |
| | 5 Aluminium | C30 3000°K | 694 9.6W HD - 300/m - 840lm | .2500 2500mm |
| | | C40 4000°K | 696 14.4W HD - 300/m - 1260lm | .XXXX Custom length in mm |
| | | C60 6000°K | | |
| | | | | |