


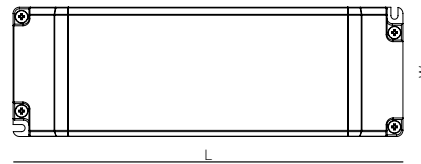



IP20 L/TE CV LED DRIVER

4722.24120



4725.24120, 47210.24120

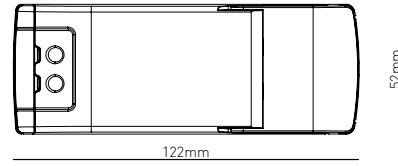

SPECIFICATION

	4722.24120	4725.24120	47210.24120
Dimensions	122x52x30mm	184x61x32mm	191x70x40mm
Type	Constant voltage	Constant voltage	Constant voltage
Dimming	Leading / trailing edge	Leading / trailing edge	Leading / trailing edge
Dimming type	Voltage reduction	Voltage reduction	PWM
IP Rating	IP20	IP20	IP20
Input voltage	220-240VAC	220-240VAC	220-240VAC
Power factor	> 0.95	> 0.95	> 0.95
Output voltage	24V	24V	24V
Output current	1.04A	2.08A	4.2A
Output power	25W	50W	100W
Safety	Open and short circuit, temperature and over load		
Compliance	Safety : EN61347-2-13.IP40 EMC : EN55015, EN61000-3-2, EN61000-4-2,3,4,5,6,8,11, EN61547		

EXPECTED FAILURE RATE & LIFE-TIME

Failure rate	tc @ Max 80°C : <0.2% / 1000hrs	
Life-time	ta 35°C	ta 50°C
	>70,000hrs	>50,000hrs

The LED Driver is designed for a minimum life-time stated above with a probability of less than 10% failure.

ORDERING INFORMATION

4722.24120	25W 24V Constant voltage leading/trailing edge LED driver
4725.24120	50W 24V Constant voltage leading/trailing edge LED driver
47210.24120	100W 24V Constant voltage leading/trailing edge LED driver